



Retracting Awning with Arms



Details

An Outrigger Retracting Awning with Arms is a lightweight wall mounted structure with either rigid or pivoting aluminium arms. An Outrigger retracting awning is exceptionally robust and can be left out in high winds and heavy rain. A retracting awning is typically a rectangular shape, and is manufactured from Ferrari 502 pvc, Dicklon32 acrylic canvas, or Outlook woven pvc coated mesh.

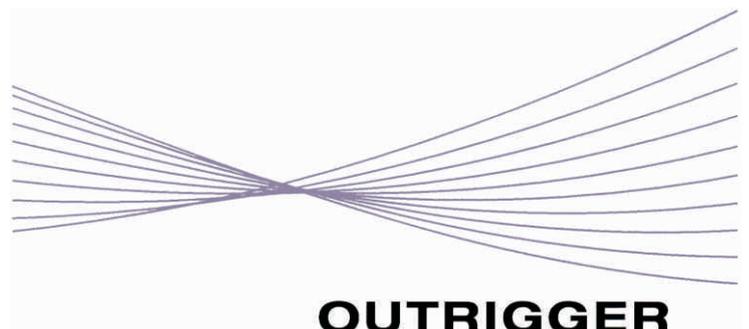

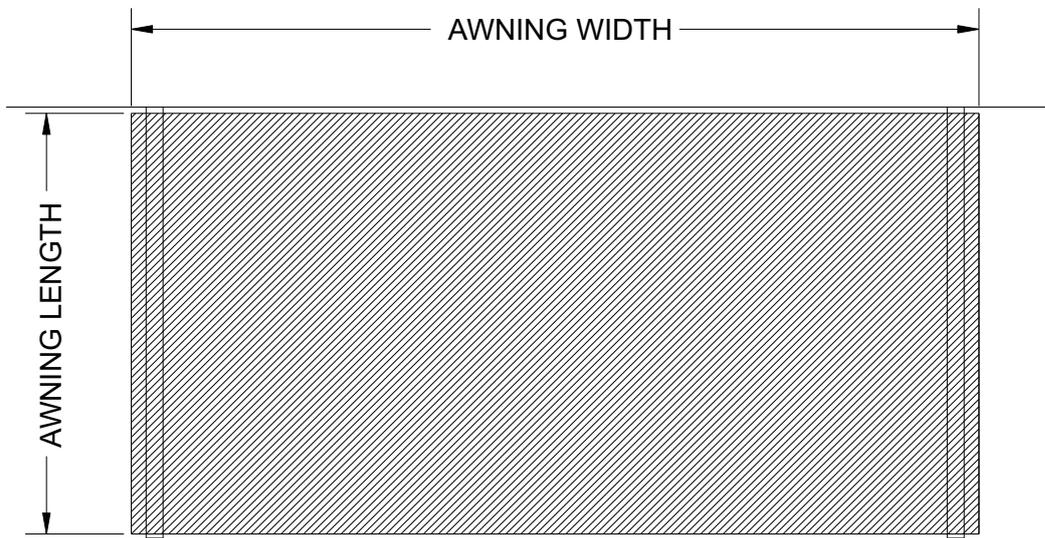

Awning Shapes

MADE TO ORDER STANDARD SHAPES

SHAPE: RAW1

SHAPE: RAW2

MADE TO ORDER CUSTOM SHAPES (for custom shapes a 20% premium will apply to the fabric price)

SHAPE: RAW9	SHAPE: RAW11	SHAPE: RAW13
SHAPE: RAW10	SHAPE: RAW12	SHAPE: RAW14

Arm Options

PIVOTING ARM OPTIONS

<p>RETRACTING AWNING WITH SLOTTED ARMS ARMS PIVOT DOWNWARDS</p>	<p>RETRACTING AWNING WITH ARMS ARMS PIVOT DOWNWARDS</p>
--	--

FIXED ARM OPTIONS

<p>WALL MOUNTED HORIZONTAL ARM</p>	<p>WALL MOUNTED ANGLED ARM</p>	<p>WALL MOUNTED HORIZONTAL ARM WITH ALUMINIUM TOP BRACE</p>	<p>ROOF MOUNTED ARM</p>
------------------------------------	--------------------------------	---	-------------------------

Retracting Awning Instructions


An Outrigger retracting awning can be left out in high winds and heavy rain.

Outriggers retracting awning is designed and constructed in accordance with the Building Code of Australia. The wind loading for a retracting awning is calculated using Australian Standard AS 4055- Wind Loads for Housing. Outriggers retracting awning is unique in that it is the only cantilevered awning available designed to withstand winds in excess of 100 km/h.

The awning design places minimal pull out load onto the wall as all the fabric tension loads are transferred through to the aluminium arms. The only load applied to the buildings wall is the weight of the awning, and the uplift load from the wind.

Outrigger recommends any one of the following three fabrics for a cantilevered awning. For a rainproof awning we would recommend Ferrari 502 Awning pvc. For installations where maximum shade is required however it is not necessary for the awning to be rainproof, we would recommend Ferrari Soltis92 pvc shade mesh. For installations where maximum shade is required at minimum cost we would recommend Outlook pvc coated yarn.

All three of the recommended fabrics are extremely durable and should give a life in excess of 12 to 20 years. To maintain a clean appearance on light colours the fabric should be pressure cleaned with a wide angle spray nozzle at least once a year. Stubborn stains can be removed with a light detergent. Oil stains may be removed with Dry Cleaning Fluid.

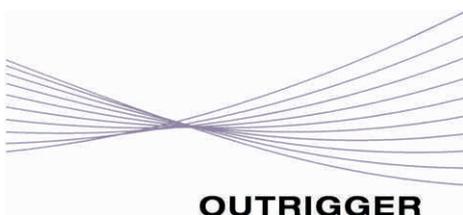

OUTRIGGER AWNINGS
PO Box 7284 Warringah Mall NSW 2100
Phone: (02) 9905 8473 Fax: (02) 9905 8476
Email: info@outriggerawnings.com.au
www.outriggerawnings.com.au
ABN 20 003 718 554