


Side Screens

Outrigger Awnings is an Australian Company, and all awnings are designed, engineered, and manufactured in Australia using the best available fabrics and materials




Details

An Outrigger Side Screen is a roller mounted screen which is either motorised or manually operated via a winch or crank. An Outrigger side screen is exceptionally robust and can be left out in high winds and heavy rain. A side screen is typically a rectangular shape, and is manufactured from clear pvc, Ferrari 502 pvc, Dicklon32 acrylic canvas, or Outlook woven pvc coated mesh.

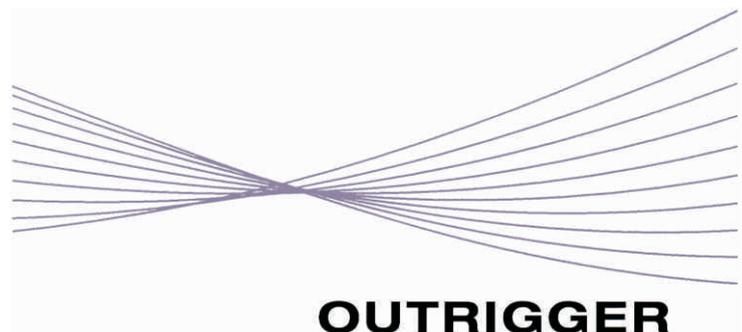


Awning Views

SIDE SCREENS FOR CURVED BATTEN AWNING STRUCTURE

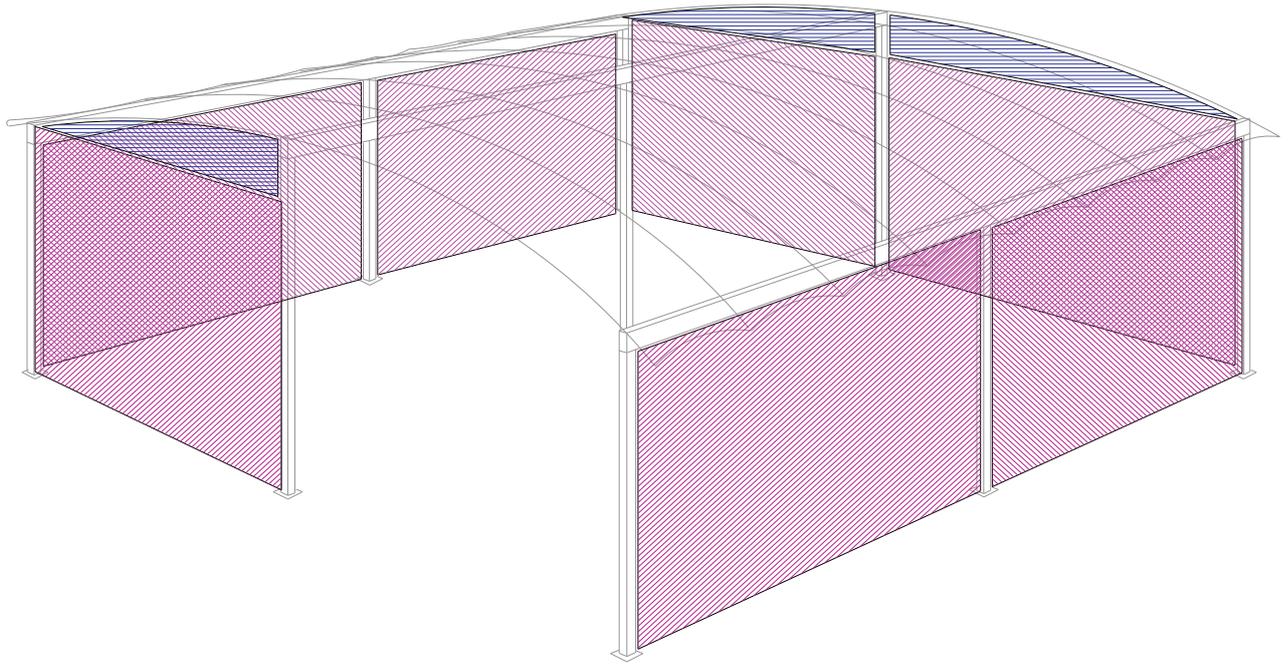


SIDE SCREENS FOR RETRACTING AWNING STRUCTURE

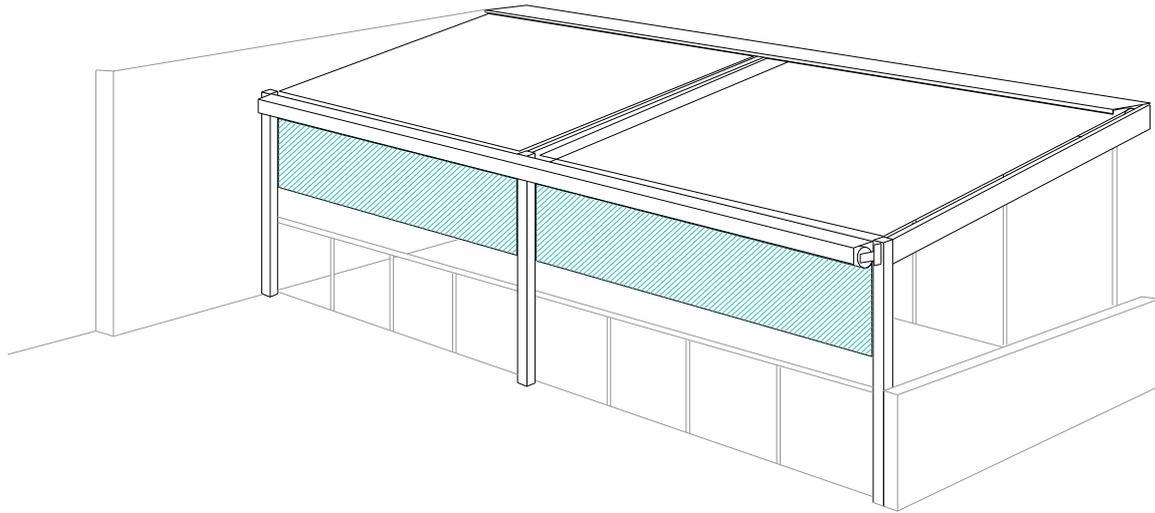

Side Screen Shapes

MADE TO ORDER STANDARD SHAPES

SHAPE: RAW1




SHAPE: RAW2




MADE TO ORDER CUSTOM SHAPES (for custom shapes a 20% premium will apply to the fabric price)


SHAPE: RAW9




SHAPE: RAW11




SHAPE: RAW13




SHAPE: RAW10




SHAPE: RAW12



SHAPE: RAW14



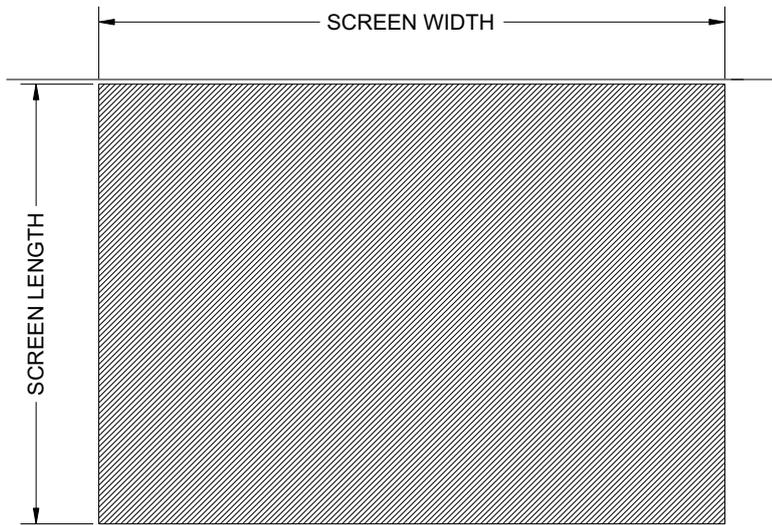


Side screens are available in standard sizes up to 6.0 metres wide by 3.0 metres long. For custom designed side screens the maximum width for a single screen is 10.0 metres and the maximum length is 6.0 metres. Side screens up to 5.0 metres wide may be operated by a crank. Side screens up to 7.0 metres wide may be operated by a winch. It is recommended all screens wider than 7.0 metres be motorised.

An Outrigger side screen can be left out in high winds and heavy rain.

Outriggers side screen is designed and constructed in accordance with the Building Code of Australia. The wind loading for a side screen is calculated using Australian Standard AS 4055-Wind Loads for Housing. Outriggers retracting side screen is unique in that it is the only side screen available designed to withstand winds up to 100 km/h.

It is a very simple and robust design that is suitable for most domestic and commercial applications.

Side screens to block out wind and rain are generally manufactured from 1mm thick uv stabilised clear pvc. Side screens for shade and privacy are manufactured from Soltis92 pvc mesh or Outlook pvc coated yarn.

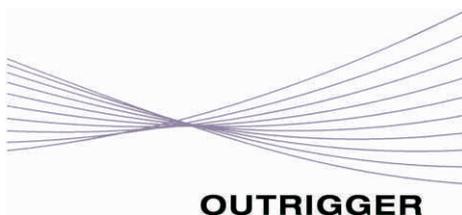

OUTRIGGER AWNINGS
 PO Box 7284 Warringah Mall NSW 2100
 Phone: (02) 9905 8473 Fax: (02) 9905 8476
 Email: info@outriggerawnings.com.au
www.outriggerawnings.com.au
 ABN 20 003 718 554